
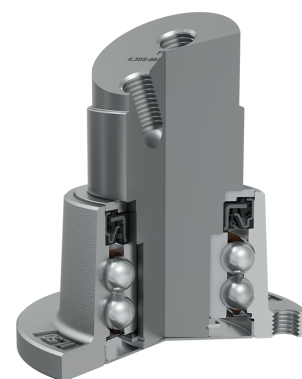


# Integrated Flange, Maintenance-Free Bearing For Independent Discs

## IL50S-98/3T-2xM16

Integrated Flange, Maintenance-Free Bearing For Independent Discs  
Cultivator

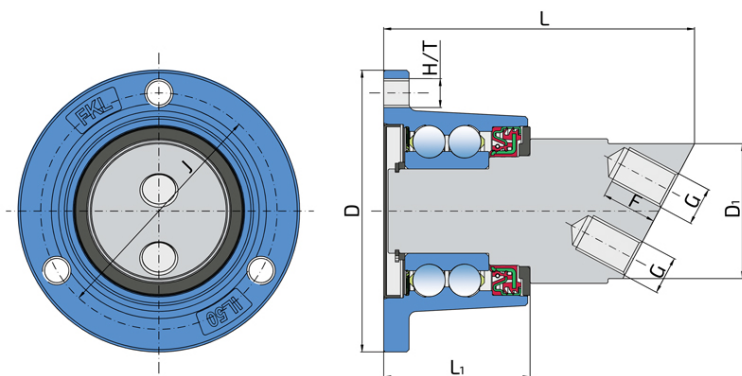

### Technical Specification

|      |                         |          |
|------|-------------------------|----------|
| J    | Pitch circle diameter   | 98 mm    |
| D    | Outside diameter        | 117 mm   |
| D1   | Outside diameter        | 56 mm    |
| H/T  | Hole/Thread             | M12 mm   |
| G    | Internal Thread         | 2xM16 mm |
| L    | Total length            | 130 mm   |
| L1   | Total flange length     | 59.8 mm  |
| F    | Length of threaded part | 23 mm    |
| kg   | Mass                    | 3.4 kg   |
| Cdyn | Dynamic load rating     | 48.76 kN |
| Co   | Static load rating      | 35.5 kN  |
| Pu   | Fatigue load limit      | 1.49 kN  |

## Sealing

### SHEET METAL SHIELD+RS SEAL / DIRTBLOCK SEAL+FORGED COVER PLATE

Sheet metal shield and RS seal on the base side and Dirtblock seal and Forged cover plate on the front side which is exposed to contaminants.

Sheet metal shield and RS seal together with attached disc eliminates the possibility of contamination from the base side. Dirtblock seal is designed for hard working condition at unfriendly environment. Half metal - half rubber outside diameter provides reliable seal retention in the bore and improves sealing performance. Inside diameter is covered by rubber and improves sealing performance and easy installation. Forged cover plate is additional, strong protection of the Dirtblock seal against mechanical damage.

This sealing provides maximum protection against liquid or solid contaminants, which significantly extends bearing service life.

