


Double Row Angular Contact Ball Bearing

3210 A 2RS

Double Row Angular Contact Ball Bearing

Seeding Machine/Disc Harrow

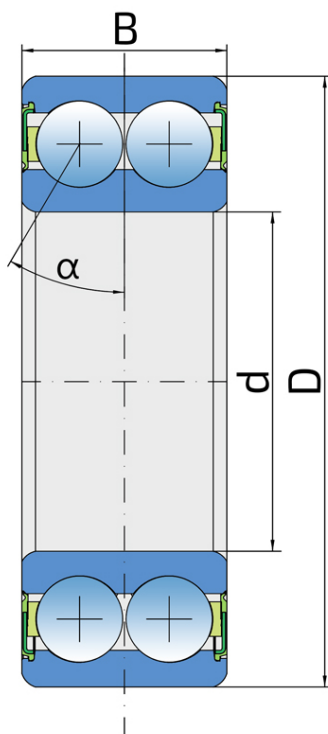

Technical Specification

d	Bore diameter	50 mm
D	Outside diameter	90 mm
B	Width inner ring	30.2 mm
α	Contact angle	30 °
kg	Mass	0.67 kg
C _{dyn}	Dynamic load rating	51 kN
C _o	Static load rating	42.5 kN
P _u	Fatigue load limit	1.79 kN

Sealing

RS SEAL / RS SEAL (2RS)

The older type of the single seal. Prevents penetration of soil, dust and water and since exposed to the impact of abrasive particles is expendable more than some new types of seals. Due to extended friction, the permitted speeds are lower. It was gradually replaced with the improved versions of S. Because of the traditional reasons Y bearings with this kind of seal do not have the additional sealing mark. It is used with the Y-bearings and deep groove ball bearings.

