


# The Bearing Solution For Seeding Machines, Integrated Flange

## IL20-73/6H-B16

The Bearing Solution For Seeding Machines, Integrated Flange Seed drill



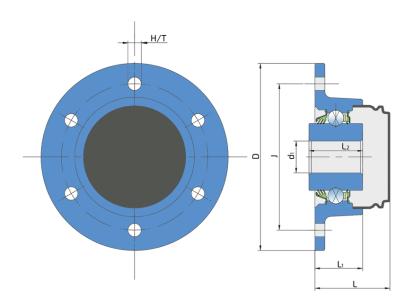



### **Technical Specification**

J	Pitch circle diameter	73.5 mm
D	Outside diameter	94 mm
H/T	Hole/Thread	6x6.4 mm
dl	Bore diameter	16 mm
L	Total length	37.7 mm
L1	Total flange length	24 mm
L2	Bearing width	27 mm
kg	Mass	0.75 kg
Cdyn	Dynamic load rating	22 kN
Со	Static load rating	15.2 kN
Pu	Fatigue load limit	0.638 kN



#### Sealing

#### T SEAL / S SEAL+METAL PROTECTIVE CAP

3-lip seal on the base side and the S seal with Metal protective cap on the front side. 3-lip seal on the base side also protected with attached disc, protecting the bearing from contamination.

S seal with a Metal protective cap on the front side eliminates bearing contaminants.

