
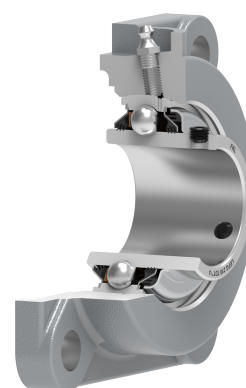


Armor Bearing Unit

LEFG 210 TDT*U

Armor Bearing Unit

Universal Solution

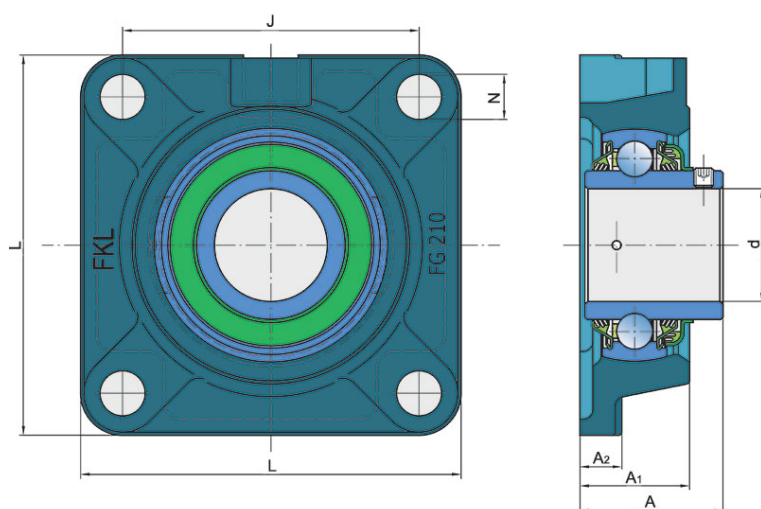

Technical Specification

d	Bore diameter	50 mm
A1	Total housing width	40 mm
A2	Housing flange thickness	16 mm
J	Distance between the holes	111 mm
L	Total length	143 mm
N	Hole diameter	16.5 mm
A	Overall width	54.6 mm
kg	Mass	2.78 kg
Cdyn	Dynamic load rating	35.1 kN
Co	Static load rating	23.2 kN
Pu	Fatigue load limit	0.974 kN

Sealing

DOUBLE T SEAL / T SEAL

3-lip seal on the base side and double 3-lip seal on the front side which is exposed to contaminants.

The double 3-lip seal on the front side protects the bearing from contaminant penetration. Also, the outer seal with 3 lips, with additional sealing, protects the inner seal from mechanical damage.

