
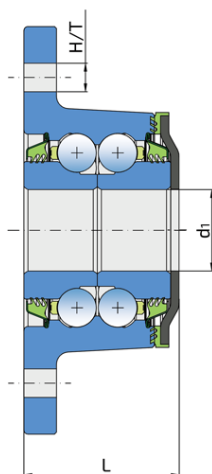


# The Bearing Solution For Seeding Machines, Integrated Flange

## IL25-75/6H-B20-T

The Bearing Solution For Seeding Machines, Integrated Flange

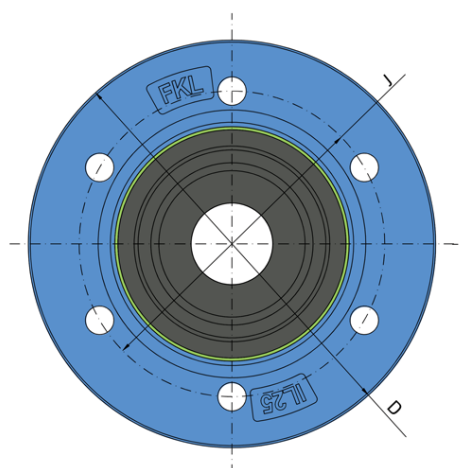

### Technical Specification

|      |                       |          |
|------|-----------------------|----------|
| J    | Pitch circle diameter | 75 mm    |
| D    | Outside diameter      | 100 mm   |
| H/T  | Hole/Thread           | 5x7 mm   |
| d1   | Bore diameter         | 20 mm    |
| L    | Total length          | 39 mm    |
| kg   | Mass                  | 0.78 kg  |
| Cdyn | Dynamic load rating   | 32 kN    |
| Co   | Static load rating    | 22 kN    |
| Pu   | Fatigue load limit    | 0.924 kN |

## Sealing

---

### T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

