


# Double Row Angular Contact Ball Bearing

## SL 3303-2S-20

Double Row Angular Contact Ball Bearing  
Seeding Machine

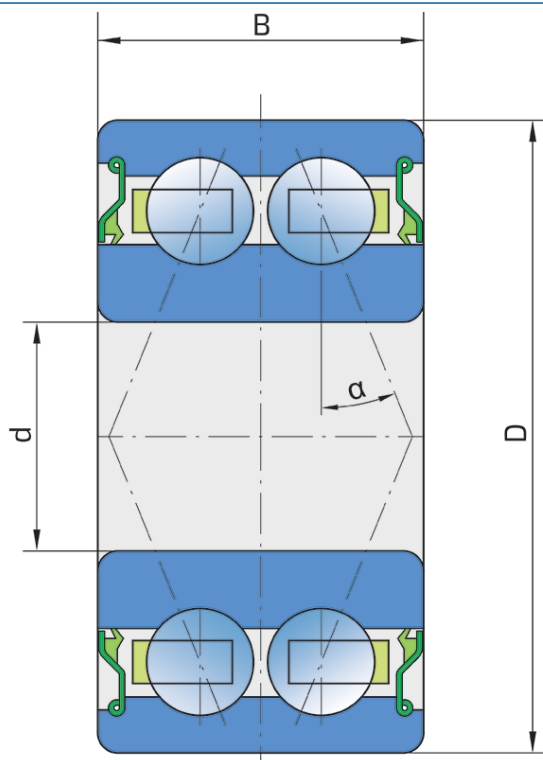

### Technical Specification

C <sub>dyn</sub>	Dynamic load rating	19.5 kN
C <sub>o</sub>	Static load rating	12.6 kN
D	Outside diameter	47 mm
d	Bore diameter	20 mm
kg	Mass	0.184 kg
B	Width inner ring	24.2 mm
α	Contact angle	25 °

## Sealing

### S SEAL / S SEAL (2S)

Single lip seal with the labyrinth between the sheet part and the rubber lip which conducts the contact sealing. The friction and speeds are the same as with RS but provides much better protection against the rough impurity particles. This is very good sealing system: the sheet part protects the seal from the soil, dust and rough particles. At the same time makes the labyrinth with the rubber part. The rubber part provides contact sealing which prevents penetration of finer impurities, water, moisture, steam etc. Suitable for neutral conditions because of the presence of the foreign materials. It is used with the Y bearing (standard) and deep groove ball bearings.

