


# **Double Row Angular Contact Ball Bearing**

## SL 5205 2D

Double Row Angular Contact Ball Bearing

Seeding Machine



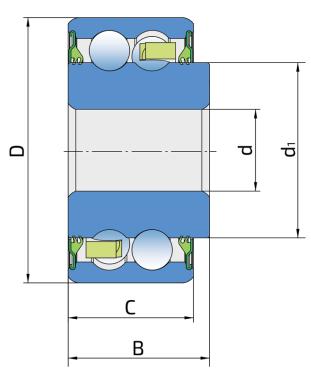



### **Technical Specification**

| d    | Bore diameter             | 16.027 mm |
|------|---------------------------|-----------|
| d1   | Outer diameter inner ring | 34.35 mm  |
| D    | Outside diameter          | 52 mm     |
| В    | Width inner ring          | 27.711 mm |
| С    | Width outer ring          | 24.562 mm |
| α    | Contact angle             | 25 °      |
| kg   | Mass                      | 0.288 kg  |
| Cdyn | Dynamic load rating       | 21.6 kN   |
| Со   | Static load rating        | 14.3 kN   |
| Pu   | Fatigue load limit        | 0.601 kN  |



### Sealing

#### D SEAL / D SEAL (2D)

2-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

