


Round Bore Series With Spherical Outer Ring - Non-Relubricable Type

W 210PPB2

Round Bore Series With Spherical Outer Ring - Non-Relubricable Type

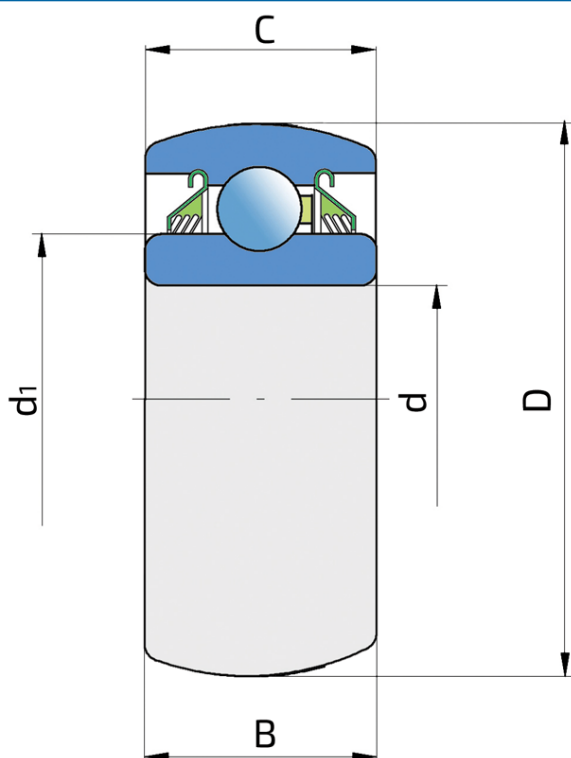

Technical Specification

d	Bore diameter	1.9382 inch
d	Bore diameter	49.23 mm
D	Outside diameter	3.5433 inch
D	Outside diameter	90 mm
B	Width inner ring	1.188 inch
B	Width inner ring	30.18 mm
C	Width outer ring	1.188 inch
C	Width outer ring	30.18 mm
d1	Outer diameter inner ring	2.461 inch
d1	Outer diameter inner ring	62.5 mm
kg	Mass	0.71 kg
Cdyn	Dynamic load rating	35 kN
Co	Static load rating	23.2 kN
Pu	Fatigue load limit	0.974 kN

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

